

Chapter 5: Simplification of Boolean Functions

1. Simplification of Boolean Functions

The goal of simplifying logical functions is to:

- Reduce the number of terms in a function, which leads to a reduction in the number of logic gates,
- Obtain a smaller, faster, and less expensive circuit.

1.1. Algebraic Simplification

The principle is to apply the rules of Boolean algebra to eliminate variables or terms,

The principle involves applying the rules of Boolean algebra to eliminate variables or terms.

Rule 1: Apply the following rules:

$$A.B + A.\overline{B} = A \qquad (A + B)(A + \overline{B}) = A$$

$$A + A.B = A \qquad A(A + B) = A$$

$$A + \overline{A}.B = A + B \qquad A(\overline{A} + B) = A.B$$

Example :

$$1. F(A,B,C) = A.\overline{B} + B.\overline{C} + B.C = A.\overline{B} + B.(\overline{C} + C) = A + B$$

$$\begin{aligned} 2. F(A,B,C,D) &= A.B.C + A.B.\overline{C} + A.\overline{B}.C.D = A.B.(C + \overline{C}) + A.\overline{B}.C.D \\ &= A.B + A.\overline{B}.C.D \\ &= A(B + \overline{B}(C.D)) \\ &= A(B + C.D) \\ &= A.B + A.C.D \end{aligned}$$

Rule 2: Adding an Existing Term:

Example :

$$\begin{aligned}
 1. \quad & A B C + \bar{A} B C + A \bar{B} C + A B \bar{C} = \\
 & A B C + \bar{A} B C + A B C + A \bar{B} C + A B C + A B \bar{C} = \\
 & \quad \quad B C \quad + \quad A C \quad + \quad A B
 \end{aligned}$$

Rule 3: Simplify the canonical form with the minimum number of terms:

Example : Let's simplify the following function:

$$1. \quad F(A,B,C) = \sum (2, 3, 4, 5, 6, 7) = A + B$$

1.2. Karnaugh Map

Looking at the algebraic simplification method, it is noticeable that it becomes quite difficult if **the number of variables increases**. Karnaugh's method is a **rapid** simplification technique.

1.2.1. Adjacency Principle

Let's examine the following expression: $A \cdot B + A \cdot \bar{B}$

Both terms have the same variables. The only difference is the state of variable B, which changes.

These terms are adjacent

$$A \cdot B + \bar{A} \cdot B = B$$

$$A \cdot B \cdot C + A \cdot \bar{B} \cdot C = A \cdot C$$

$$A \cdot B \cdot C \cdot D + A \cdot B \cdot \bar{C} \cdot D = A \cdot B \cdot D$$

These terms are not adjacent

$$A \cdot B + \bar{A} \cdot \bar{B}$$

$$A \cdot B \cdot C + A \cdot \bar{B} \cdot \bar{C}$$


$$A \cdot B \cdot C \cdot D + \bar{A} \cdot B \cdot \bar{C} \cdot D$$

1.2.2. Method Principle


- It is a table with 2^n cells, where 'n' is the number of variables.
- The method can be applied to logical functions with 2, 3, 4, 5, and 6 variables.
- Rows and columns are numbered in Gray code.
- Each minterm (TT) corresponds to a cell with a value of 1.
- Each maxterm (TT) corresponds to a cell with a value of 0.
- The 0_s can be omitted to simplify the representation.

1.2.3. Simplification


- Identify adjacent cells containing a 1 and group them in sets of 2^n (32, 16, 8, 4, 2, 1).
- Two cells are adjacent when they are positioned next to each other horizontally and vertically.
- Cells at the ends of the same row or column are adjacent (cylindrical form).
- The 4 corner cells are considered adjacent.
- The size of a group must be a power of 2.
- With the Karnaugh method, the goal is to **minimize the number of groups** (minimize the number of terms) that contain **the maximum number of 1_s** (minimize the number of variables).
- Eliminate variables that change states within a group.
- The final function is the sum of terms where the variable states do not change within a group.
- One or more cells can be common to several groups.
- Stop when there is no 1 outside the groups.



TWO-VARIABLE ARRAY



THREE-VARIABLE ARRAY



FOUR-VARIABLE ARRAY


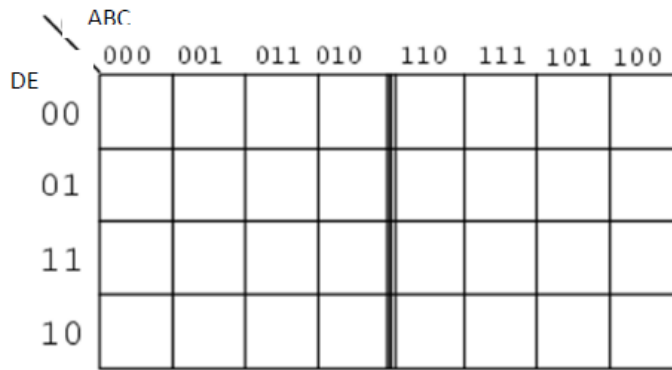



Tableau 5 variables

Note:


Beyond 6 variables, since the Karnaugh method is no longer applicable, the Mc-cluskey method is used.




$$F = \overline{B}\overline{C}$$




$$F = AB$$




$$F = \overline{B}\overline{C}$$




$$F = B$$




$$F = \overline{C}$$




$$F = \overline{B}\overline{C} + \overline{C}D$$




$$F = \overline{B} + \overline{A}CD$$




$$F = \overline{B}\overline{C}D + \overline{A}\overline{C}D + AB\overline{C}$$




$$F = BD + \overline{A}\overline{C}\overline{D} + AB\overline{C} + \overline{A}\overline{B}C$$




$$F(A,B,C,D) = \overline{A}B + \overline{B}D + \overline{C}D$$




$$F(A,B,C,D) = \overline{C}.D + A.B.C + \overline{A}.B.C.\overline{D}$$



$$= \overline{C}D + AD + \overline{B}D + \overline{A}B\overline{C} + AB\overline{C} + \overline{A}BC\overline{D}$$




$$F(A,B,C) = C + AB$$

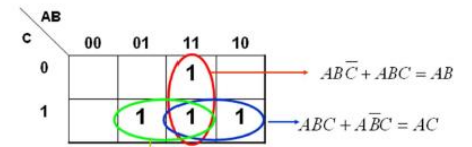


$$F(A,B,C) = AB + AC + BC$$

The simplification result may not be unique

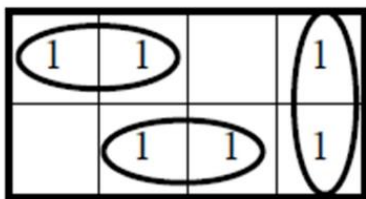


$$= \overline{A}C + BC + AB$$

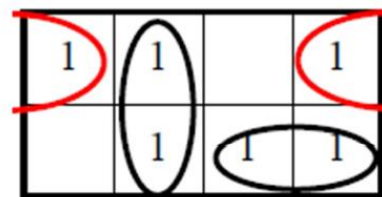

$$= \overline{B}C + \overline{A}B + AC$$

We can apply the Karnaugh method on MAXTERMS

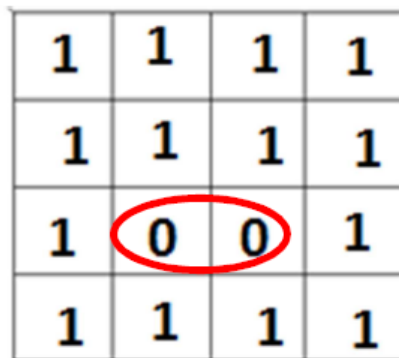

$$= \overline{B} + \overline{C} + \overline{D}$$